


# TN 1 Serie • Series

Polytetrafluorethylen (PTFE)

Edelstahldraht • Stainless Steel wire

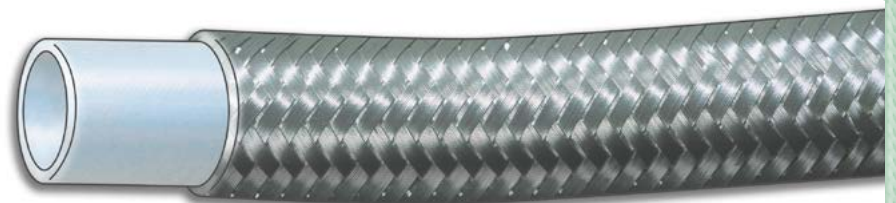

Artikel Nr. Article ref.	Größe Size	Innen-Ø Inner-Ø mm inch	Außen-Ø Outer-Ø mm inch	Biegeradius <sup>3)</sup> Bend Radius <sup>3)</sup> mm inch	Arbeitsdruck <sup>2)</sup> Working Pressure <sup>2)</sup> bar psi	Platzdruck Burst Pressure bar psi	Gewicht Weight kg/100m	Produktionslänge <sup>4)</sup> Product Length <sup>4)</sup> m
▶ TN1-03	2	3,3 1/8	6,5 0,26	40 1,57	260 3800	1040 15000	7,0	40 - 100
▶ TN1-05	3	4,7 3/16	7,8 0,31	50 1,97	225 3200	900 13000	10,0	40 - 100
▶ TN1-06	4	6,5 1/4	9,4 0,37	75 2,95	195 2800	780 11300	11,0	40 - 100
▶ TN1-08	5	8 5/16	11,5 0,45	100 3,94	180 2600	720 10400	16,0	40 - 100
▶ TN1-10	6	10,3 3/8	13,6 0,53	120 4,72	150 2200	600 8700	20,0	40 - 100
▶ TN1-13	8	12,7 1/2	16,5 0,61	135 5,31	145 2100	580 8400	24,0	40 - 100
▶ TN1-16	10	15,6 5/8	18,9 0,74	160 6,30	125 1800	500 7250	30,0	40 - 60
▶ TN1-20	12	19,8 3/4	23,5 0,93	210 8,27	95 1400	380 5500	37,0	40 - 60
▶ TN1-25	16	24,7 1	28,0 1,10	260 10,24	70 1000	280 4000	44,0	40 - 60

1), 2), 3), 4) Siehe Seite 36 / See page 36.

Temperaturbeständigkeit : • **temperature resistant** : -70°C bis • to 200°C.



Konstruktionsänderungen vorbehalten.  
Stand 09/2015.  
Subject to change.  
Printed 09/2015.